


Unitra NX Series Self-Prime Engine Driven Pumps

- Die-Cast aluminum pump casing and volute.
- Durable cast-iron impellers
- Improved suction results in faster priming and excellent performance.
- Built-in check valve helps retain prime and eliminate backflow.
- High quality, self-lubricating mechanical seal with corrosion-resistant shaft sleeve.
- Included patented suction strainer helps ensure trouble-free performance.
- Factory-coupled to Subaru engine.
- Convenient carrying handle and anti-creep mounts.
- Optional: roll cage, molded, suction/discharge connectors, quick connects, and wheel kits.

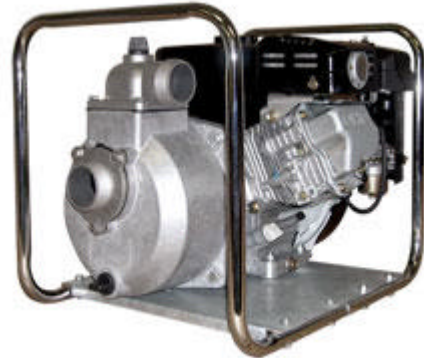

Unitra NX Series Self-Prime Engine Driven Pumps					
Product Number	Suction Size MNPT (in)	Discharge Size MNPT (in)	Engine HP	Spherical Solids (in)	Approximate Weight (lbs)
NX54R	2	2	4.5	½	55
NX86R	3	3	6	½	80

Unitra NX Performance Chart			
Product Number	Engine HP	Head (ft)	Flow Rate (GPM)
NX54R	4.5	0	155
		25	135
		50	105
		75	65
		100	15
NX86R	6	0	190
		25	160
		50	127
		75	86
		100	37